MOTOROLA

Microphone Hang-Up Clip Installation

Model HLN5391A

PROCEDURE

Refer to Figure 1, Installation and Parts List, and perform the following installation steps.

(1) Position the mic hang-up clip on the dashboard and start the two 6-20 self-drilling screws supplied in the installation kit.

(2) Place the back-up plate behind the dashboard. Be sure the screws go through the holes in the back-up plate; then tighten the self-drilling screws.

NOTE

Be sure to mount the back-up plate with the tang facing away from the dashboard.

(3) Attach the ground wire's spade lug to the tang on the rear of the back-up plate. Attach the ring lug end of the ground wire to the vehicle's chassis ground.

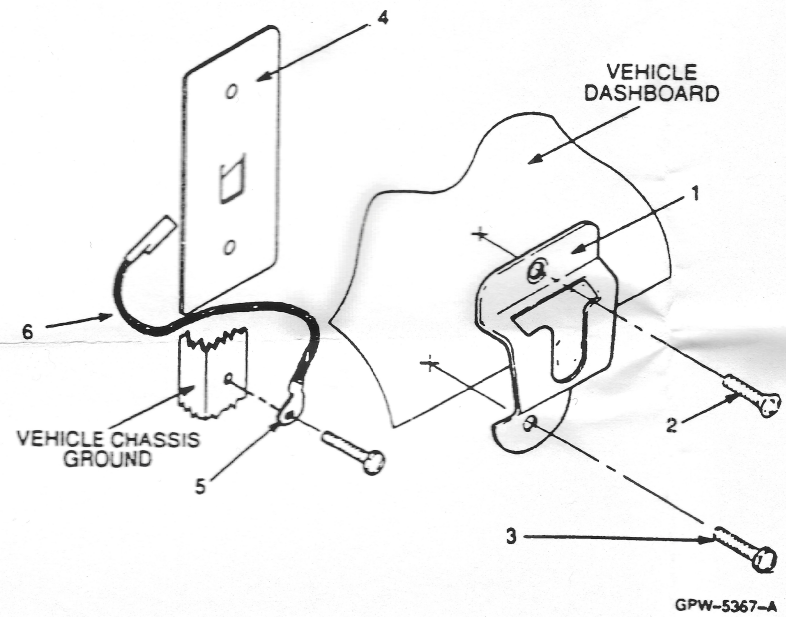

PARTS LIST
HLN5391A Microphone Hang-Up Clip

ITEM NO.	MOTOROLA PART NO.	DESCRIPTION
1	01-80743T91	mic hang-up clip assembly
2	03-12002C01	6-20 x 1/2" self drilling screw, flat head
3	03-12002A01	6-20 x 1/2" self drilling screw, hex washer headscrew
4	07-80257N01	back-up plate bracket
5	29-00824456	ring lug
6	01-80750T52	spade lug and wire

Figure 1. Installation and Parts List

Ⓜ and Motorola are trademarks of Motorola, Inc.

Instruction Manual

© 1993, 1989 by Motorola, Inc., Radio Products Group
8000 W. Sunrise Blvd., Ft. Lauderdale, FL 33322
Printed in U.S.A. 5/93. All Rights Reserved.

68P80102W25-B